


此棒符合 ISO h6，此棒可用作精密加工零件。

* 此棒长度有 3mm-25mm，直径有 45mm, 50mm, 60mm, 70mm, 75mm, 80mm, 90mm, 100mm, 125mm, 140mm, 180mm

精磨短棒h6带倒角

Milling cutting blanks ISO h6, chamfered one end

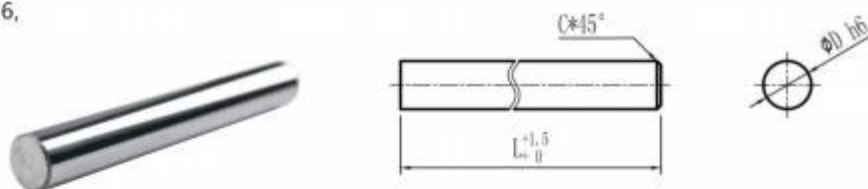

规格/Type	尺寸/Dimension		
	直径	长度	倒角
	ØD(mm)	L(mm)	C(mm)
Ø3*50	3.0	50	0.4
Ø3*100	3.0	100	0.4
Ø3*150	3.0	150	0.4
Ø4*45	4.0	45	0.4
Ø4*50	4.0	50	0.4
Ø4*150	4.0	150	0.4
Ø5*50	5.0	50	0.5
Ø5*100	5.0	100	0.5
Ø5*150	5.0	150	0.5
Ø6*50	6.0	50	0.5
Ø6*60	6.0	60	0.5
Ø6*70	6.0	70	0.5
Ø7*45	7.0	45	0.6
Ø7*60	7.0	60	0.6
Ø8*45	8.0	45	0.6
Ø8*60	8.0	60	0.6
Ø8*70	8.0	70	0.6
Ø8*100	8.0	100	0.6
Ø10*70	10.0	70	0.6
Ø10*80	10.0	80	0.6
Ø10*90	10.0	90	0.6
Ø10*100	10.0	100	0.6
Ø12*75	12.0	75	0.8
Ø12*90	12.0	90	0.8
Ø12*100	12.0	100	0.8
Ø14*75	14.0	75	0.8
Ø16*100	16.0	100	0.8
Ø16*125	16.0	125	0.8
Ø25*100	25.0	100	1.0
Ø25*140	25.0	140	1.0
Ø25*180	25.0	180	1.0

□□ □□:

材质名称 (Grade)	WC (%)	CO (%)	晶粒度 Grain size (μm)	比重 Density (g/cm^3) ± 0.1	硬度 Hardness (HRA) ± 0.5	断裂韧性 KIC ($\text{MNm}^{-3/2}$)	抗折力 TRS (kgf/mm^2)
H09U	91	9	0.3	14.5	93.7	9.2	>350
H12U-T	88	12	0.3	14.2	93.0	9.6	>350
H06U-T	94	6	0.4	14.9	94.5	8.4	>380
H06U	94	6	0.4	14.9	94.0	8.7	>380
H08U	92	8	0.4	14.7	93.6	8.8	>380
H08U-K	92	8	0.4	14.7	93.2	9.0	>380
H12U	88	12	0.4	14.3	92.5	9.4	>350
H10S	90	10	0.6	14.4	92.1	9.9	>350
H10F	90	10	0.8	14.4	91.8	10.9	>350